

→ Temporary & Deployable Solutions


With increasing demand for temporary solutions for roadworks and major events, Altron has developed a range of pre-cast foundations that fully comply with HA standards and industry standard foundation requirements. Based on our knowledge gained from rapid deployable products for the telecoms industry, we cast foundations in house at our factory, keeping close control over the process and ship UK wide using specialist vehicles for offloading.

Features & Services

- o Pre cast foundations can be produced to suit any Altron product
- o Ducting arrangements provided to suit customer requirements
- o Proven product and method of delivery, used in many installations over the past 8 years
- o Can be supplied in accordance with Highways Agency requirements
- o Full design service & support




DEPLOYABLE PRE-CAST FOUNDATION BLOCK

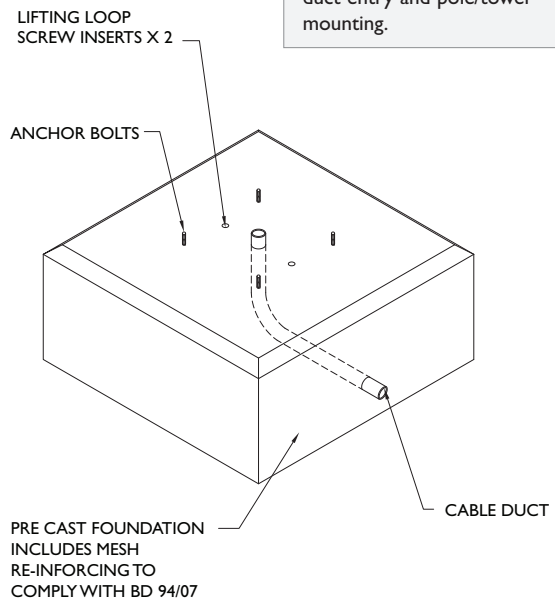

Standard block sizes giving a cost effective solution, produced to customer requirements for cable duct entry and pole/tower mounting.

DEPLOYABLE SEGMENTED PRE-CAST FOUNDATION BLOCK

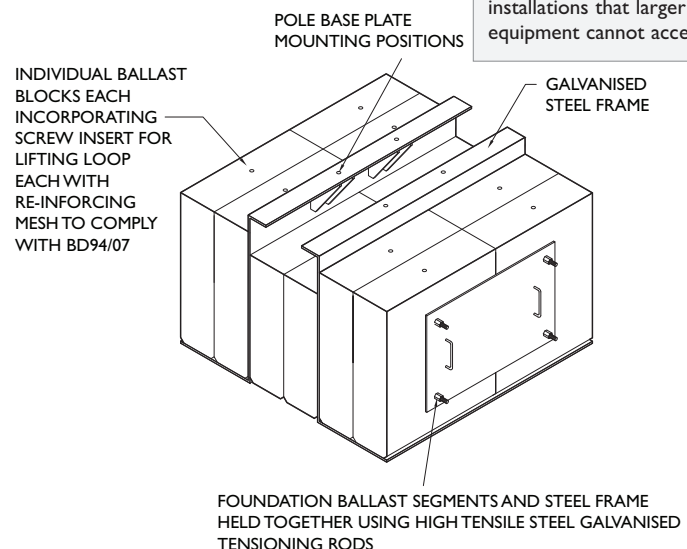

Used for large foundation requirements, enabling installations that larger lifting equipment cannot access.

CYLINDRICAL PRE-CAST FOUNDATION BLOCK

Our cylindrical foundations can be produced to any size, within weight restrictions, and are designed to be rolled out on short lead times.

